



JetSpray Fix

Product description

JetSpray Fix is an organic binder that is used in conjunction with JetSpray Thermal glass mineral wool blowing insulation. It is part of the JetSpray System, a complete blowing wool insulation solution.

Surfaces should be first treated with JetSpray Primer before JetSpray Fix is spray-applied in conjunction with JetSpray Thermal glass mineral wool blowing insulation. JetSpray Fix is mixed with water to provide a strong adhesion.

The JetSpray System offers excellent thermal performance. It is also lightweight and convenient to apply.

Applications

JetSpray Fix can be used for both residential and industrial / commercial applications. It is ideal for car park ceilings as well as for insulation of crawl spaces, basements and garages.



Car parks

The JetSpray System is a high performance, lightweight insulation solution with a bright and clean-looking finish. Its ease and speed of application make it ideal for insulating large areas such as car parks whilst causing minimal disruption.



Crawl spaces

Even difficult to reach areas, such as crawl spaces beneath houses, can be relatively easily insulated using JetSpray Fix in conjunction with the other components of the JetSpray System. Insulation can be carried out quickly and without disturbing residents. Because it is lightweight it adds very little weight to the structure.

June 2015

JetSpray System



Benefits

Convenience

- Ease of application
- Part of a complete insulation solution

Solution efficiency


- Lightweight solution
- Excellent thermal performance
- Time saving

Environment

- Clean installation
- Energy saving
- Eurofins Gold Standard for Indoor Air Quality

Technical information

JetSpray Fix is supplied in the form of a concentrate and has to be mixed with water in the water tank in the proportion given below. The mix is then applied as a binder together with JetSpray Thermal. Stir before use.



Approximate amount of JetSpray Fix required

JetSpray Thermal installed thickness, mm	Surface to be covered, m ²					
	100		500		1000	
	binder* quantity, litres	number of buckets**	binder* quantity, litres	number of buckets**	binder* quantity, litres	number of buckets**
50	520	1,3	2600	6,5	5200	13
100	1040	2,6	5200	13	10400	26
150	1560	3,9	7800	19,5	15600	39
200	2080	5,2	10400	26	20800	52

* JetSpray Fix + water

** JetSpray Fix

Delivery

Packaging	Content per bucket / weight	Transport volume
Bucket	25 kg	18 buckets on pallet

Shelf life

Six months from manufacturing date (date is stated on packaging).

JetSpray System certification



Eurofins Indoor Air Comfort Gold Certificate for indoor air quality demonstrates compliance of product emissions with the criteria of many of the mandatory and voluntary product regulations set up by national organisations and private labelling bodies. This ensures that a certified product meets the highest possible standard for the relevant product group.




The EUCEB trademark used by manufacturers who use mineral wool classified as non-carcinogenic providing for the confidence in mineral wool products that carry this trademark.



The French VOC Label (Émissions dans l'air intérieur) demonstrates low emissions of pollutants at source. The JetSpray "A+" label represents very little emissions (très faibles émissions).



Dimensions

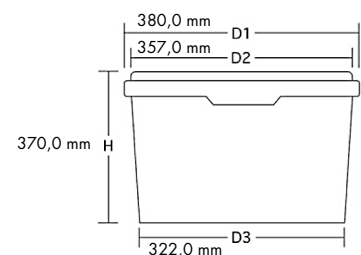

Knauf Insulation

Central Marketing Team

Axis Parc, Rue E. Francqui 7
1435 Mont-St-Guibert - Belgium
Phone: +32 (0) 10 48 84 53
Fax: +32 (0) 10 48 84 74

Email

marketing.europe@knaufinsulation.com

www.blowingwool.knaufinsulation.com